

SPECIFICATION & APPROVALS

CUSTOMER:

PowerConnections P/N: ACP

DESCRIPTION: AMERICAL CONVERTER PLUG

DATE: 12 January 2019

REVISION: H

Submission Sample Quantity: 10 Pieces

SUPPLIER SPECIFICATION SUBMISSION

Date of Application	12 January 2019	Specification No.	700-0001
Supplier's Name	PowerConnections	Supplier Code	
Part Name	American Converter Plug	Part No.	ACP

Tick the relevant box “ ✓ ”

Reason for Submission

- ☐ 1. New application
- ☐ 2. New part(s) is added to accepted specification
- ☒ 3. Revision of accepted specification

(Revision requested by ☐ customer Or ☒ supplier)

Revision / Change

- ☐ 1. The specification attached to this sheet does not deviate from the customer specification
- ☐ 2. Revision(s) within the limits of customer specification is proposed. Revision proposal(s) listed below.
- ☒ 3. Revision(s) beyond the limits of customer specification is proposed. Revision proposal(s) listed below. However, all other items contained within the specification are identical to the customer specification.

Revision(s) shall be marked with a triangle “Δ” in the specification attached.

Revision No.	Date	Revision Description	Reason for Revision
A	15-06-04	First issue	
B	09-07-04	Revision of power rating	Correction of typing error
C	20-01-06	Licence and test report update	New data available
D	10-07-06	Licence and test report update	New data available
E	25-07-06	Marbo Fuse data added	Alternative fuse available
F	10-05-10	Revised to BS 1363-5	Change of applicable standard
G	31-08-10	Revision to marking	Change of Co Marking
H	11-01-19	Base Marking change and AsiaFuse data added	BS1363 and RoHS Directive updates, and new fuse used

Checked By

--	--	--	--	--


Approved By

--

SPECIFICATION

CONTENTS

Section	Description	Page
1.0	Application	4
2.0	Name / Part Number	4
3.0	Shape and Dimensions	4
4.0	Rating	4
5.0	Safety Specification – Approvals	4
6.0	Electrical Strength Test	5
7.0	Mechanical Strength Tests	6
8.0	Construction Tests	7
9.0	Glow Wire Tests	7
10.0	Material Strength Tests	8
11.0	Component Name	9
12.0	Fuse Specification	10
13.0	Installation Procedure	15
14.0	Packing Method	16
15.0	Dimensional Drawing	Error! Bookmark not defined.
16.0	Marking	17

		THIS DOCUMENT CONTAINS INFORMATION WHICH IS PROPRIETRY TO POWERCONNECTIONS AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		
TITLE	AMERICAN CONVERTER PLUG	DRAWN BY	CHECKED BY	APPROVED BY
Part No. ACP	SPECIFICATION NO. 700-0001			
	REVISION G			

SPECIFICATION

1.0 Application

This Specification defines the performance for the American Converter Plug, which is designed for the Nema 1-15 plugs..

2.0 Name / Part Number

Name: American Converter Plug

Part Number: ACP

3.0 Shape and Dimensions

See Attached

4.0 Rating

Voltage: AC 240V / 50Hz

Current: 10A

Ambient Working Temperature: -5 +70 °C

Storage Temperature: -40 +80 °C 90%RH

5.0 Safety Specification – Approvals

BS1363-5

PowerConnections		THIS DOCUMENT CONTAINS INFORMATION WHICH IS PROPRIETRY TO POWERCONNECTIONS AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		
TITLE	AMERICAN CONVERTER PLUG	DRAWN BY	CHECKED BY	APPROVED BY
Part No. ACP	SPECIFICATION NO. 700-0001			
	REVISION G			

SPECIFICATION

6.0 Electrical Strength Test


No	Test	Clause in Standard	Result	Description of test 6 pieces are subjected to this series of test
6.1	Provision for cables and Cords	19.1 BS1363-5	Pass	A Nema 1-15 Plug is fitted into an ACP and the cord is subjected to 25 pulls lasting is with a force of 30N, no more than 2mm of displacement is allowed. The cord is then subjected to the pulling force and at 3750v to ensure no breakdown in connection.
6.2	Resistance to ageing	14.2 BS1363-5	Pass	Samples to be kept in a cabinet for 7 days (168 hours) at 70°C±2°C, then tested for stickiness or greasiness by with dry rough cloth wrapped around a fore-finger, force 5N.
6.3	Insulation resistance	15.1 BS1363-5	Pass	500V DC is applied and after 60s the insulation resistance is checked and must be not less than: a) 5MΩ between parts of opposite polarity, b) 5MΩ between parts of opposite polarity connected together and other insulated parts including the earth.
6.4	Electric Strength	15.1 BS1363-5	Pass	2000V AC 50Hz is applied and after 60s the Voltage drop is checked and must be within 3% RMS of the applied Voltage: a) between live parts of opposite polarity b) between live parts of opposite polarity connected together and other insulated parts including the earth.

PowerConnections		THIS DOCUMENT CONTAINS INFORMATION WHICH IS PROPRIETRY TO POWERCONNECTIONS AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		
TITLE	AMERICAN CONVERTER PLUG	DRAWN BY	CHECKED BY	APPROVED BY
Part No. ACP	SPECIFICATION NO. 700-0001			
	REVISION G			

SPECIFICATION

7.0 Mechanical Strength Tests

No	Test	Clause in Standard	Result	Description of test 4 pieces are subjected to this series of test
7.1	Tumble Barrel test	20.2 BS1363-5	Pass	The product is subjected singly to 1000-drop test in the apparatus as shown in the (BS 1363-5) standard Figure 17.
7.2	Fuse insertion test	20.3.1 BS1363-5	Pass	A solid stainless steel fuse link is inserted 20 times, to test the strength of the clips.
7.3	Temperature rise test	16 BS1363-5	Pass	Current of 11 amps is passed for not less than 4 hours and not greater than 8 hours at 250 volts or until stable, the temperature rise is then measured
7.3.1	Box Ambient	For each sample		22.0°C, 21.8°C, 22.2°C
7.3.2	Line Pin Spacer temp rise	For each sample		25.8K, 23.3K, 23.2K max. temp rise permissible 37K
7.3.3	Neutral Pin Spacer temp rise	For each sample		18.4K, 17.2K, 16.4K max. temp rise permissible 37K
7.3.4	Accessible external surface temp rise	For each sample		12.9K, 10.6K, 9.2K max. temp rise permissible 52K

		THIS DOCUMENT CONTAINS INFORMATION WHICH IS PROPRIETRY TO POWERCONNECTIONS AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		
TITLE	AMERICAN CONVERTER PLUG	DRAWN BY	CHECKED BY	APPROVED BY
Part No. ACP	SPECIFICATION NO. 700-0001			
	REVISION G			


SPECIFICATION

8.0 Construction Tests

No	Test	Clause in Standard	Result	Description of test 3 pieces are subjected to this series of test
8.1	Accessibility to live parts	9.1 BS1363-5	Pass	With the unit assembled as in normal use a probe 12 to BS EN 61032:1998 is supplied with a force of 5N whilst a voltage of 45V is supplied to the live parts via an electrical indicator. No access permissible
8.2	Lid to Base security	12.5 BS1363-5	Pass	With the parts at 70°C±5° C a force of 60N is applied to the cover fixing screw, no damage or impairment of function to have occurred.
8.3	Resistance to Heat	22.2 BS1363-5	Pass	With the parts at 70°C±5° C a force of 20N is applied to the plug in the jaws of the apparatus shown in Figure 23, no damage or impairment of function to have occurred, shown by re-testing insulation resistance and electric strength, and must fit the Figure 5 gauge
8.4	Resistance to Heat	22.3 BS1363-5	Pass	Ball pressure test using the apparatus shown in Figure 24, test temperature at 75°C±5° C, the force of 20N is applied for 60 mins after an initial period of 10 mins. The sample is then cooled by immersion in water at room temp and the indentation caused by the ball measured, this must be less than 2mm in diameter.

9.0 Glow Wire Tests

No	Test	Clause in Standard	Result	Description of test 3 pieces are subjected to this series of test
9.1	Resistance to Abnormal Heat	23.2 BS1363-5	Pass	A glow wire of 750°C is applied to all the insulating surfaces there must be no visible flames or glowing or these must extinguish within 30s of removal of the glow wire.

<div style="text-align: center;">  </div>		THIS DOCUMENT CONTAINS INFORMATION WHICH IS PROPRIETRY TO POWERCONNECTIONS AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		
		TITLE	DRAWN BY	CHECKED BY
AMERICAN CONVERTER PLUG				
Part No. ACP	SPECIFICATION NO. 700-0001			
REVISION G				

SPECIFICATION


10.0 Material Strength Tests

No	Test	Clause in Standard	Result	Description of test 3 pieces are subjected to this series of test
10.1	Construction of plug	12.2 BS1363-5	Pass	Critical dimensions of the plug must not exceed the dimensions given in Figure 4a. Compliance checked using the gauge as shown in Figure 5.
10.2	Flexibility of pins	12.8.11 BS1363-5	Pass	Using the apparatus as shown in Figure 8 pins are tested with force of 4.2 to 4.4N applied 25mm from the engagement face, the pins must not deflect by more than 3°30'. The results on the pins were <1°. After this test the parts are again checked again checked using the Figure 5 gauge.

PowerConnections		THIS DOCUMENT CONTAINS INFORMATION WHICH IS PROPRIETRY TO POWERCONNECTIONS AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		
TITLE	AMERICAN CONVERTER PLUG	DRAWN BY	CHECKED BY	APPROVED BY
Part No. ACP	SPECIFICATION NO. 700-0001			
	REVISION G			

SPECIFICATION

11.0 Component Name

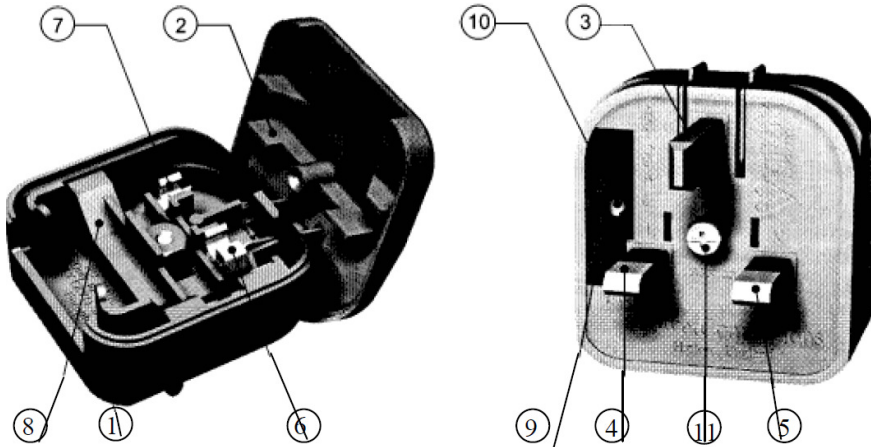

No	Component	Material
1	Base	Polypropylene Cheng Yu Plastic PP222
2	Cover	Polypropylene Cheng Yu Plastic PP222
3	Earth Pin,	Nylon 66 30% Glass Filled – Toray CM3004G30
4	Live Pin	Brass (Universal) with Nylon 66 Sleeve JGP Perrite Vitamide AF11BK
5	Neutral Pin	Brass (Universal) with Nylon 66 Sleeve JGP Perrite Vitamide AF11BK
6	Live Clip	Phosphor Bronze Taiwan VPN170-190
7	Neutral Clip	Phosphor Bronze Taiwan VPN170-190
8	Insert	Nylon 66, JGP Perrite Vitamide AF11BK
9	Fuse Holder	Nylon 66, JGP Perrite Vitamide AF11BK
10	Fuse	^Δ AsiaFuse (Better Fuse) 3A, 5A (BS1362,ASTA) Bussmann 3A, 5A (BS1362, ASTA) Taller (Atlas) 3A, 5A (BS1362, ASTA, BSi) Marbo 3A, 5A (BS1362, ASTA,)
11	Screw	Plain or Tamperproof Steel Screw with Zinc and Clear Pacification – Golden Metal

<div>PowerConnections</div>		THIS DOCUMENT CONTAINS INFORMATION WHICH IS PROPRIETRY TO POWERCONNECTIONS AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		
TITLE	AMERICAN CONVERTER PLUG	DRAWN BY	CHECKED BY	APPROVED BY
Part No. ACP	SPECIFICATION NO. 700-0001			
	REVISION G			


SPECIFICATION

12.0 Fuse Specification

BETTER FUSE/ASIA FUSEΔ



Dimensions (units: mm)

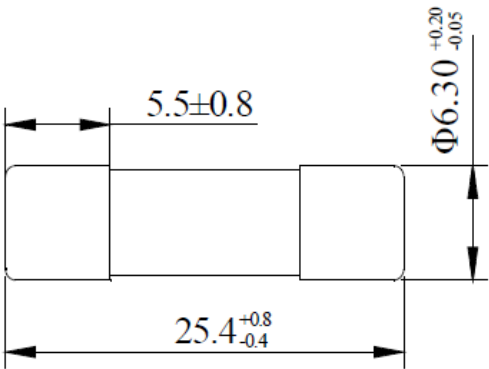

Operating Temperature:

-55°C to 125°C

Storage Conditions:

+10°C to +60°C

Relative humidity: ≤ 75% yearly average
without dew, maximum 30 days at 95%

Vibration Resistance:


24 cycles at 15 min. each (60068-6)
10-60Hz at 0.75mm amplitude
60-2000Hz at 10g acceleration

PowerConnections		THIS DOCUMENT CONTAINS INFORMATION WHICH IS PROPRIETRY TO POWERCONNECTIONS AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		
TITLE	AMERICAN CONVERTER PLUG	DRAWN BY	CHECKED BY	APPROVED BY
Part No. ACP	SPECIFICATION NO. 700-0001			
	REVISION G			

SPECIFICATION

Electrical characteristics

Electrical Characteristics									
Amp Code	Rated Current	Max. Voltage	Breaking Capacity	Nominal Melting $I_t(A^2sec)$	Max. Power Dissipation	Color	Approvals		
							CCC	PSB	ASTA
1100	1A	264V AC	6kA@ 264V AC 50Hz P.f.0.3-0.4	1.44	1W	black	●	○	○
1200	2A			8.73		black	○	○	○
1300	3A			29.16		red	●	●	●
1500	5A			144		black	●	●	●
1700	7A			146.4		black	○	○	●
2100	10A			324		black	●	●	●
2130	13A			961		brown	●	●	●

		THIS DOCUMENT CONTAINS INFORMATION WHICH IS PROPRIETRY TO POWERCONNECTIONS AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		
TITLE	AMERICAN CONVERTER PLUG	DRAWN BY	CHECKED BY	APPROVED BY
Part No. ACP	SPECIFICATION NO. 700-0001			
	REVISION G			

SPECIFICATION



ASTA LICENCE



The ASTA Diamond Mark is a symbol of electrical safety. It provides evidence for customers and authorities that Intertek has independently tested and certified the product's compliance to applicable safety standards, also that Intertek monitors production and testing to ensure subsequent production continues to comply with stated standards.

This Licence is valid until the review date or earlier if preceded by the withdrawal of the Approval Standard or otherwise withdrawn by the Certification Body. Current validity status can be confirmed by contacting: Intertek (ASTA office) Centre Court Meridian Business Park Leicester LE19 1WD United Kingdom Tel: +44 (0)116 263 0330 asta@intertek.com

Details of Approved variants, components and sites are given on Endorsements to this Licence (3 pages)



010

www.intertek.com

This Licence authorises use of the

ASTA Diamond Mark

Licence No. 974

Organisation:

AsiaFuse (HK) Electronics Limited

Room 703 Kowloon Building, 555 Nathan Road, Kowloon, Hong Kong

Product:

**General Purpose Fuse Links
for Domestic & Similar Purposes
AF63B-3A, AF63B-5A, AF63B-7A
AF63C-10A, AF63-13A**

Designation:

240 Volts a.c. 50 Hz
Breaking capacity 6kA rms
Rated power loss less than 1 watt

Approval Standard:

BS 1362: 1973 plus Amendments 1 & 2

Issue number:

5

Review date:

31 January 2023

Factory Reference:

BETTCN.A1

R W Hayward

Name

Signature

31st January 2018


Date

PowerConnections



THIS DOCUMENT CONTAINS INFORMATION WHICH IS PROPRIETARY TO POWERCONNECTIONS AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

PowerConnections		THIS DOCUMENT CONTAINS INFORMATION WHICH IS PROPRIETARY TO POWERCONNECTIONS AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		
TITLE	AMERICAN CONVERTER PLUG	DRAWN BY	CHECKED BY	APPROVED BY
Part No. ACP	SPECIFICATION NO. 700-0001			
	REVISION G			

SPECIFICATION

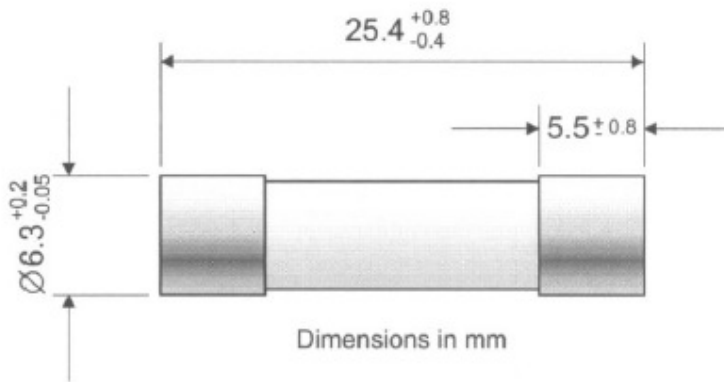





Marking

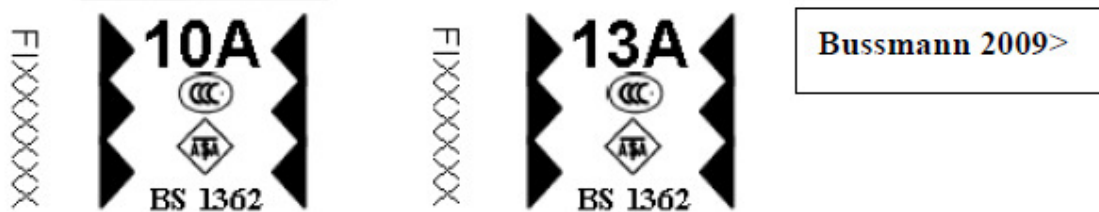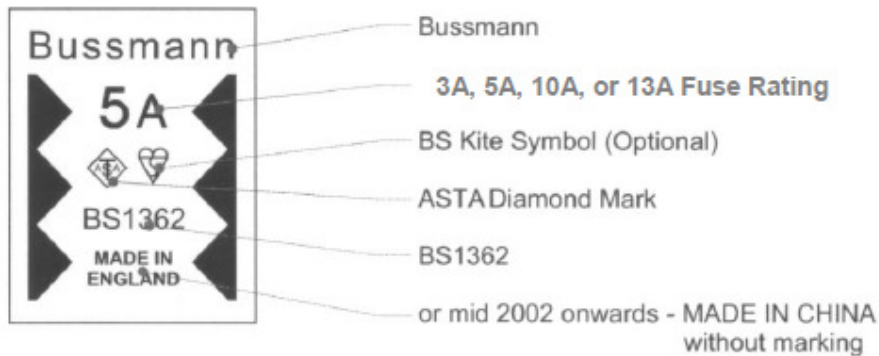

Print Block		Print Colour
Computer number	Rating	
F1820227	2A	Black
F1820228	3A	Red
F1820229	5A	Black
F1820230	10A	Black
F1820231	13A	Brown

PowerConnections		THIS DOCUMENT CONTAINS INFORMATION WHICH IS PROPRIETRY TO POWERCONNECTIONS AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		
TITLE	AMERICAN CONVERTER PLUG	DRAWN BY	CHECKED BY	APPROVED BY
Part No. ACP	SPECIFICATION NO. 700-0001			
	REVISION G			

SPECIFICATION

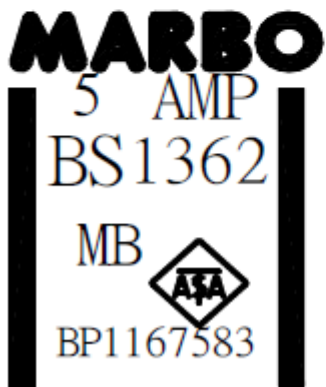


Details as above page (Bussmann)

PowerConnections		THIS DOCUMENT CONTAINS INFORMATION WHICH IS PROPRIETRY TO POWERCONNECTIONS AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		
TITLE	AMERICAN CONVERTER PLUG	DRAWN BY	CHECKED BY	APPROVED BY
Part No. ACP	SPECIFICATION NO. 700-0001			
	REVISION G			

SPECIFICATION

13.0 Installation Procedure

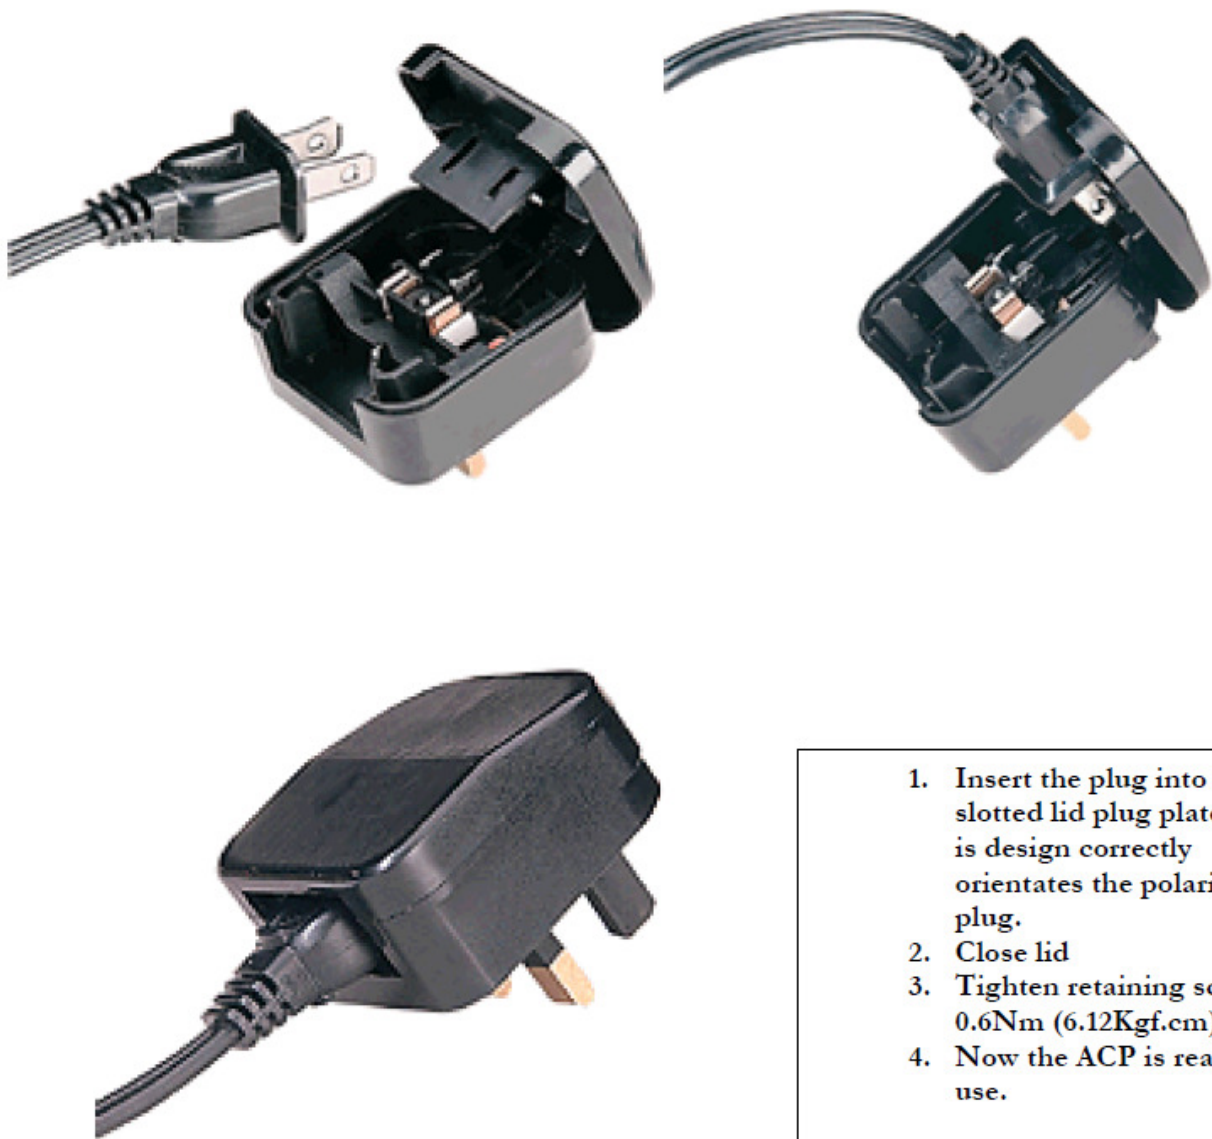


1. Insert the plug into the slotted lid plug plate, this is design correctly orientates the polarised plug.
2. Close lid
3. Tighten retaining screw to 0.6Nm (6.12Kgf.cm).
4. Now the ACP is ready for use.

PowerConnections		THIS DOCUMENT CONTAINS INFORMATION WHICH IS PROPRIETRY TO POWERCONNECTIONS AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		
TITLE	AMERICAN CONVERTER PLUG	DRAWN BY	CHECKED BY	APPROVED BY
Part No. ACP	SPECIFICATION NO. 700-0001			
	REVISION G			

SPECIFICATION


14.0 Packing Method

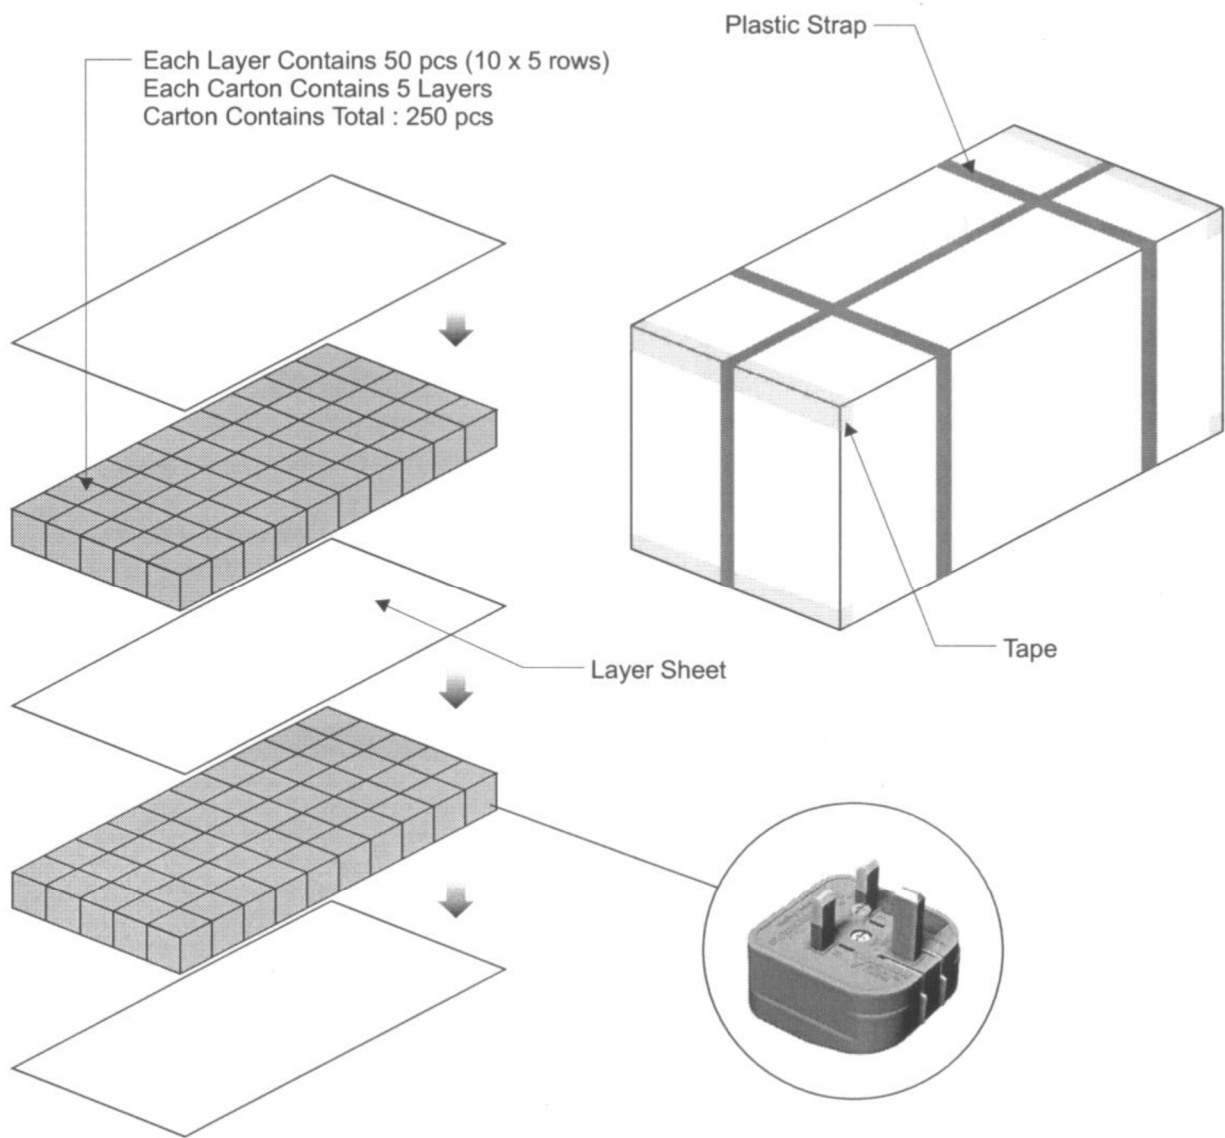

PowerConnections		THIS DOCUMENT CONTAINS INFORMATION WHICH IS PROPRIETRY TO POWERCONNECTIONS AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		
TITLE	AMERICAN CONVERTER PLUG	DRAWN BY	CHECKED BY	APPROVED BY
Part No. ACP	SPECIFICATION NO. 700-0001			
	REVISION G			

SPECIFICATION

15.0 Marking

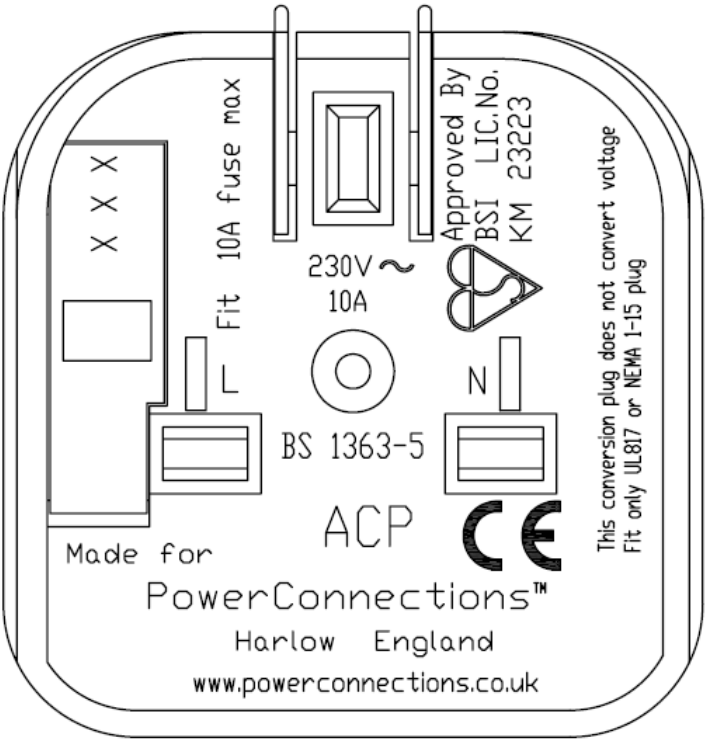

PowerConnections		THIS DOCUMENT CONTAINS INFORMATION WHICH IS PROPRIETRY TO POWERCONNECTIONS AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		
TITLE	AMERICAN CONVERTER PLUG	DRAWN BY	CHECKED BY	APPROVED BY
Part No. ACP	SPECIFICATION NO. 700-0001			
REVISION G				