

SPECIFICATION & APPROVALS

CUSTOMER:

PowerConnections P/N: CP1

DESCRIPTION: Europlug

DATE: 12 Mar 2022

Revision: I

Submission Sample Quantity: 10 Pieces

UNCONTROLLED IF PRINTED OR COPIED

SUPPLIER SPECIFICATION SUBMISSION

Date of Application	10 Mar 2022	Specification No.	700-0001
Supplier's Name	PowerConnections	Supplier Code	CP1
Part Name	EuropPlug	Part No	

Tick the relevant box " "


Reason for Submission	<input type="checkbox"/> 1. New application <input type="checkbox"/> 2. New part(s) is added to accepted specification <input checked="" type="checkbox"/> 3. Revision of accepted specification (Revision requested by <input type="checkbox"/> customer Or <input type="checkbox"/> supplier)
Revision / Change	<input type="checkbox"/> 1. The specification attached to this sheet does not deviate from the customer specification <input type="checkbox"/> 2. Revision(s) within the limits of customer specification is proposed. Revision proposal(s) listed below. <input checked="" type="checkbox"/> 3. Revision(s) beyond the limits of customer specification is proposed. Revision proposal(s) listed below. However, all other items contained within the specification are identical to the customer specification. Revision(s) shall be marked with a triangle "Δ" in the specification attached.

Revision No.	Date	Revision Description	Reason for Revision
A	15-02-04	First issue	
B	01-06-04	Replacement pages,	Use new BSi certificates
C	01-11-04	Replace pages,	Remove old reports
D	20-01-06	Update, new report RoHS data	new report RoHS data
E	25-07-06	SEM fuse data added	Alternative fuse available
F	10-05-10	Revised to BS1363-5	Change of applicable Standard
G	31-08-10	Bussman Fuse revision	Change of fuse marking
H	04-01-22	Jade Fuse data Added	Alternative fuse available
I	25-09-22	Base marking changed to include UKCA logo	Introduction of UKCA rating, replaces CE marking in the UK

		THIS DOCUMENT CONTAINS INFORMATION WHICH IS PROPRIETRY TO POWERCONNECTIONS AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION			
TITLE	Plugtop Converter Plug		DRAWN BY	CHECKED BY	APPROVED BY
Part No. CP1		SPECIFICATION NO. 700-0001			
REVISION I					

Table of Contents

Section	Description	Page
1.0	Application	4
2.0	Name/Part Number	4
3.0	Shape and Dimensions	4
4.0	Rating	4
5.0	Safety Specifications – Approvals	4
6.0	Electrical Strength Test	5
7.0	Mechanical Strength Test	6
8.0	Construction Tests	7
9.0	Glow Wire Tests	7
10.0	Construction Tests	8
11.0	Component Name	9
12.0	Fuse Specification	10
13.0	Installation Procedure	12
14.0	Packing Method	13
15.0	Dimensional Drawing and Markings	14

PowerConnections		THIS DOCUMENT CONTAINS INFORMATION WHICH IS PROPRIETRY TO POWERCONNECTIONS AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		
TITLE	Plugtop Converter Plug	DRAWN BY	CHECKED BY	APPROVED BY
Part No. CP1	SPECIFICATION NO. 700-0001			
REVISION I				

1.0 Application

This Specification defines the performance for the Converter Plug, which is designed for the Euro Plug (CEE7).

2.0 Name/Part Number

Name: Europlug

Part Number: CP1

3.0 Shape and Dimensions

See Below (Section 15)

4.0 Rating

Voltage: AC 250V ~ 50Hz

Current: 10A

Ambient Working Temperature: -5 + 70°C

Storage Temperature: -40 + 80°C 90%RH

5.0 Safety Specifications – Approvals

Plug: BSI Kitemark Licence No. KM 52467

Fuse: ASTA Diamond Mark Licence No.500


Standards

Plug: BS 1363-5

Fuse: BS1362


For BSI Kite Mark Licence validation visit <https://www.bsigroup.com/en-GB/Product-Directory/>

For ASTA Diamond Mark Validation visit <http://www.astabeab.com/buyers-by-number.asp>

PowerConnections			THIS DOCUMENT CONTAINS INFORMATION WHICH IS PROPRIETRY TO POWERCONNECTIONS AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		
TITLE	Plugtop Converter Plug		DRAWN BY	CHECKED BY	APPROVED BY
Part No. CP1		SPECIFICATION NO. 700-0001			
REVISION I					


6.0 Electrical Strength Test

No.	Test	Clause in Standard	Result	Description of test 6 pieces are subjected to this series of test
6.1	Provision for cables and Cords	19.1 BS1363-5	Pass	A CEE7 Euro Plug is fitted into a BCA and the CEE7 cord is subjected to 25 pulls lasting is with a force of 30N, no more than 2mm of displacement is allowed. The cord is then subjected to the pulling force and at 3750v to ensure no breakdown in connection.
6.2	Resistance to ageing	14.2 BS1363-5	Pass	Samples to be kept in a cabinet for 7 days (168 hours) at 70°C±2°C, then tested for stickiness or greasiness by with dry rough cloth wrapped around a fore-finger, force 5N.
6.3	Insulation Resistance	15.2 BS1363-5	Pass	500V DC is applied and after 60s the insulation resistance is checked and must be not less than: a) 5MΩ between parts of opposite polarity, b) 5MΩ between parts of opposite polarity connected together and other insulated parts including the earth.
6.4	Electric Strength	15.1 BS1363-5	Pass	2000V AC 50Hz is applied and after 60s the Voltage drop is checked and must be within 3% RMS of the applied Voltage: a) between live parts of opposite polarity b) between live parts of opposite polarity connected together and other insulated parts including the earth.

PowerConnections		THIS DOCUMENT CONTAINS INFORMATION WHICH IS PROPRIETRY TO POWERCONNECTIONS AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		
TITLE	Plugtop Converter Plug	DRAWN BY	CHECKED BY	APPROVED BY
Part No. CP1	SPECIFICATION NO. 700-0001			
REVISION I				

7.0 Mechanical Strength Test

No.	Test	Clause in Standard	Result	Description of test 4 pieces are subjected to this series of test
7.1	Tumble Barrel test	20.2 BS1363-5	Pass	The product is subjected singly to 1000-drop test in the apparatus as shown in the (BS 1363-5) standard Figure 17.
7.2	Fuse insertion test	20.3.1 BS1363-5	Pass	A solid stainless steel fuse link is inserted 20 times, to test the strength of the clips.
7.3	Temperature rise test	16 BS1363-5	Pass	Current of 11 amps is passed for not less than 4 hours and not greater than 8 hours at 250 volts or until stable, the temperature rise is then measured
7.3.1	Box Ambient	For each sample		22.6°C, 22.9°C, 23.0°C
7.3.2	Line Pin Spacer temp rise	For each sample		24.8K, 25.4K, 24.2K max. temp rise permissible 37K
7.3.3	Neutral Pin Spacer temp rise	For each sample		17.2K, 17.7K, 17.6K max. temp rise permissible 37K
7.3.4	Accessible external surface temp rise	For each sample		13.4K, 12.4K, 12.1K max. temp rise permissible 52


PowerConnections		THIS DOCUMENT CONTAINS INFORMATION WHICH IS PROPRIETRY TO POWERCONNECTIONS AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		
TITLE	Plugtop Converter Plug	DRAWN BY	CHECKED BY	APPROVED BY
Part No. CP1	SPECIFICATION NO. 700-0001			
REVISION I				

8.0 Construction Tests

No.	Test	Clause in Standard	Result	Description of test 3 pieces are subjected to this series of test
8.1	Accessibility to live parts	9.1 BS1363-5	Pass	With the unit assembled as in normal use a probe 12 to BS EN 61032:1998 is supplied with a force of 5N whilst a voltage of 45V is supplied to the live parts via an electrical indicator. No access permissible.
8.2	Lid to Base security	12.5 BS1363-5	Pass	With the parts at 70°C±5° C a force of 60N is applied to the cover fixing screw, no damage or impairment of function to have occurred.
8.3	Resistant to Heat	22.2 BS1363-5	Pass	With the parts at 70°C±5° C a force of 20N is applied to the plug in the jaws of the apparatus shown in Figure 23, no damage or impairment of function to have occurred, shown by re-testing insulation resistance and electric strength, and must fit the Figure 5 gauge.
8.4	Resistant to Heat	22.3 BS1363-5	Pass	Ball pressure test using the apparatus shown in Figure 24, test temperature at 75°C±5° C, the force of 20N is applied for 60 mins after an initial period of 10 mins. The sample is then cooled by immersion in water at room temp and the indentation caused by the ball measured, this must be less than 2mm in diameter.



9.0 Glow Wire Tests

No.	Test	Clause in Standard	Result	Description of test 3 pieces are subjected to this series of test
9.1	Resistance to Abnormal Heat	23.2 BS1363-5	Pass	A glow wire of 750°C is applied to all the insulating surfaces there must be no visible flames or glowing or these must extinguish within 30s of removal of the glow wire.


PowerConnections		THIS DOCUMENT CONTAINS INFORMATION WHICH IS PROPRIETRY TO POWERCONNECTIONS AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION			
TITLE	Plugtop Converter Plug		DRAWN BY	CHECKED BY	APPROVED BY
Part No. CP1		SPECIFICATION NO. 700-0001			
REVISION I					

10.0 Construction Tests

No.	Test	Clause in Standard	Result	Description of test 3 pieces are subjected to this series of test
10.1	Construction of plug	12.2 BS1363-5	Pass	Critical dimensions of the plug must not exceed the dimensions given in Figure 4a. Compliance check using the gauge as shown in Figure 5.
10.2	Flexibility of pins	12.8.11 BS1363-5	Pass	Using the apparatus as shown in Figure 8 pins are tested with force of 4.2 to 4.4N applied 25mm from the engagement face, the pins must not deflect by more than 3°30'. The results on the pins were <1°. After this test the parts are again checked again checked using the Figure 5 gauge.

		THIS DOCUMENT CONTAINS INFORMATION WHICH IS PROPRIETRY TO POWERCONNECTIONS AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		
TITLE	Plugtop Converter Plug	DRAWN BY	CHECKED BY	APPROVED BY
Part No. CP1	SPECIFICATION NO. 700-0001			
REVISION I				

11.0 Component Name

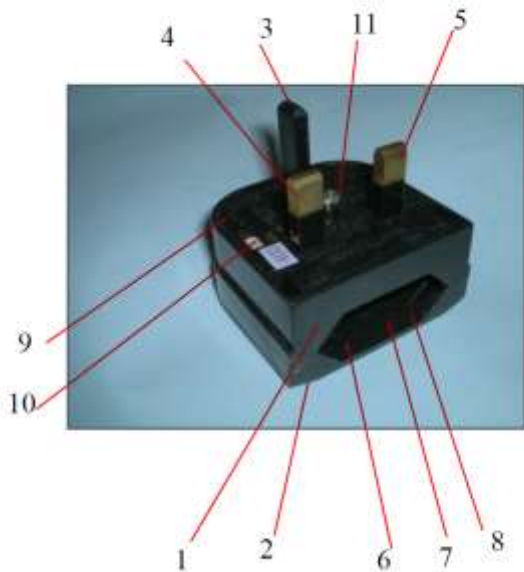

No.	Test	Material
1	Base	Polypropylene LG Lupol GP1007 FC
2	Cover	Polypropylene LG Lupol GP1007 FC
3	Earth Pin	Nylon 66 30% Glass Filled – Rhodia A30H2V25
4	Live Pin	Brass (Universal) with Nylon 66 Sleeve Dow 21SPC
5	Neutral Pin	Brass (Universal) with Nylon 66 Sleeve Dow 21SPC
6	Live Clip, Fuse Clip	Phosphor Bronze Taiwan VPN170-190
7	Neutral Clip	Phosphor Bronze Taiwan VPN170-190
8	Insert	Polypropylene LG Lupol GP1007 FC
9	Fuse Holder	Nylon 66, Dow 21SPC
10	Fuse	Group Talent (SEM) 3A, 5A, 10A (ASTA, BSI) Bussmann 3A, 5A (BS1362, ASTA)
11	Screw	Plain or Tamperproof Steel Screw with Zinc and Clear Pacification Luen Tai

PowerConnections		THIS DOCUMENT CONTAINS INFORMATION WHICH IS PROPRIETRY TO POWERCONNECTIONS AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		
TITLE	Plugtop Converter Plug	DRAWN BY	CHECKED BY	APPROVED BY
Part No. CP1	SPECIFICATION NO. 700-0001			
REVISION I				

12.0 Fuse Specification

SEM (Group Talents Ltd)

Marking



Designation:

- 1 A - SEM 11-01A
- 2 A - SEM 11-02A
- 3 A - SEM 11-03A & SEM 12-03A
- 5 A - SEM 11-05A & SEM 12-05A
- 7 A - SEM 11-07A
- 10 A - SEM 11-10A & SEM 12-10A
- 13 A - SEM 11-13A & SEM 12-13A

Rating

240 Va.c. 50 Hz, 1, 2, 3, 5, 7, 10, 13 Amperes



Breaking Capacity

6 kA r.m.s

Rated Power loss

Less than 1 Watt

PowerConnections		THIS DOCUMENT CONTAINS INFORMATION WHICH IS PROPRIETRY TO POWERCONNECTIONS AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		
TITLE	Plugtop Converter Plug	DRAWN BY	CHECKED BY	APPROVED BY
Part No. CP1		SPECIFICATION NO. 700-0001		
		REVISION I		

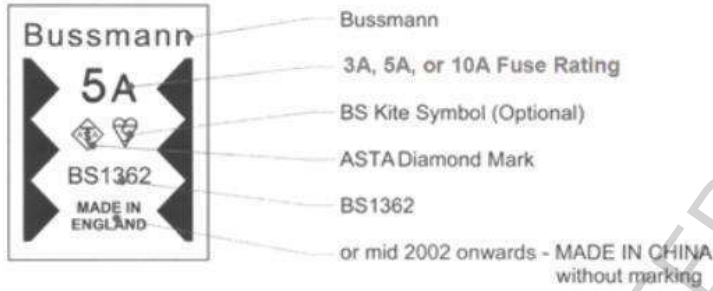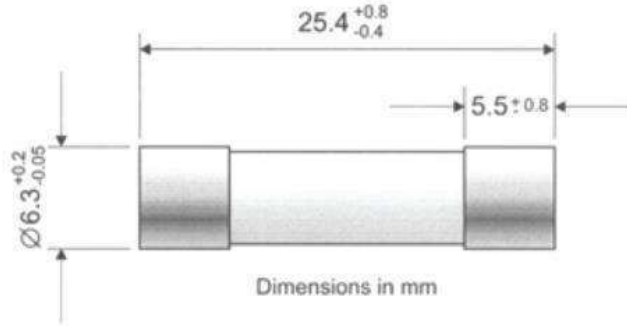

Print	Block		Print Colour
	Computer number	Rating	
FI820227	2A	Black	
FI820228	3A	Red	
FI820229	5A	Black	
FI820230	10A	Black	
FI820231	13A	Brown	

JADE[®] JADE[®] JADE[®] JADE[®] JADE[®]

BS1362 SS167	BS1362 SS167	BS1362 SS167	BS1362 SS167	BS1362 SS167
3A	5A	7A	10A	13A
LEAD FREE	LEAD FREE	LEAD FREE	LEAD FREE	LEAD FREE

PowerConnections		THIS DOCUMENT CONTAINS INFORMATION WHICH IS PROPRIETRY TO POWERCONNECTIONS AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		
TITLE	Plugtop Converter Plug	DRAWN BY	CHECKED BY	APPROVED BY
Part No. CP1	SPECIFICATION NO. 700-0001			
REVISION I				

13.0 Installation Procedure



Fig 1



Fig 2


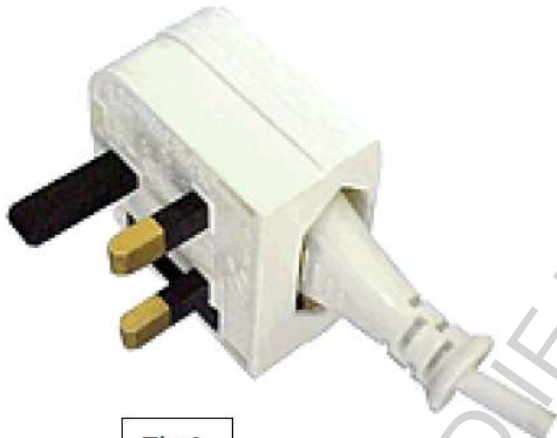


Fig 3

Insert the VDE Plug as shown and tighten the screw on the base to 0.6Nm. (6.12 Kgf.cm)
 Check that VDE plug is correctly fitted by trying to remove it.
 Now ready for use.


		THIS DOCUMENT CONTAINS INFORMATION WHICH IS PROPRIETRY TO POWERCONNECTIONS AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		
		DRAWN BY	CHECKED BY	APPROVED BY
TITLE	Plugtop Converter Plug			
Part No. CP1		SPECIFICATION NO. 700-0001		
		REVISION I		

14.0 Packing Method

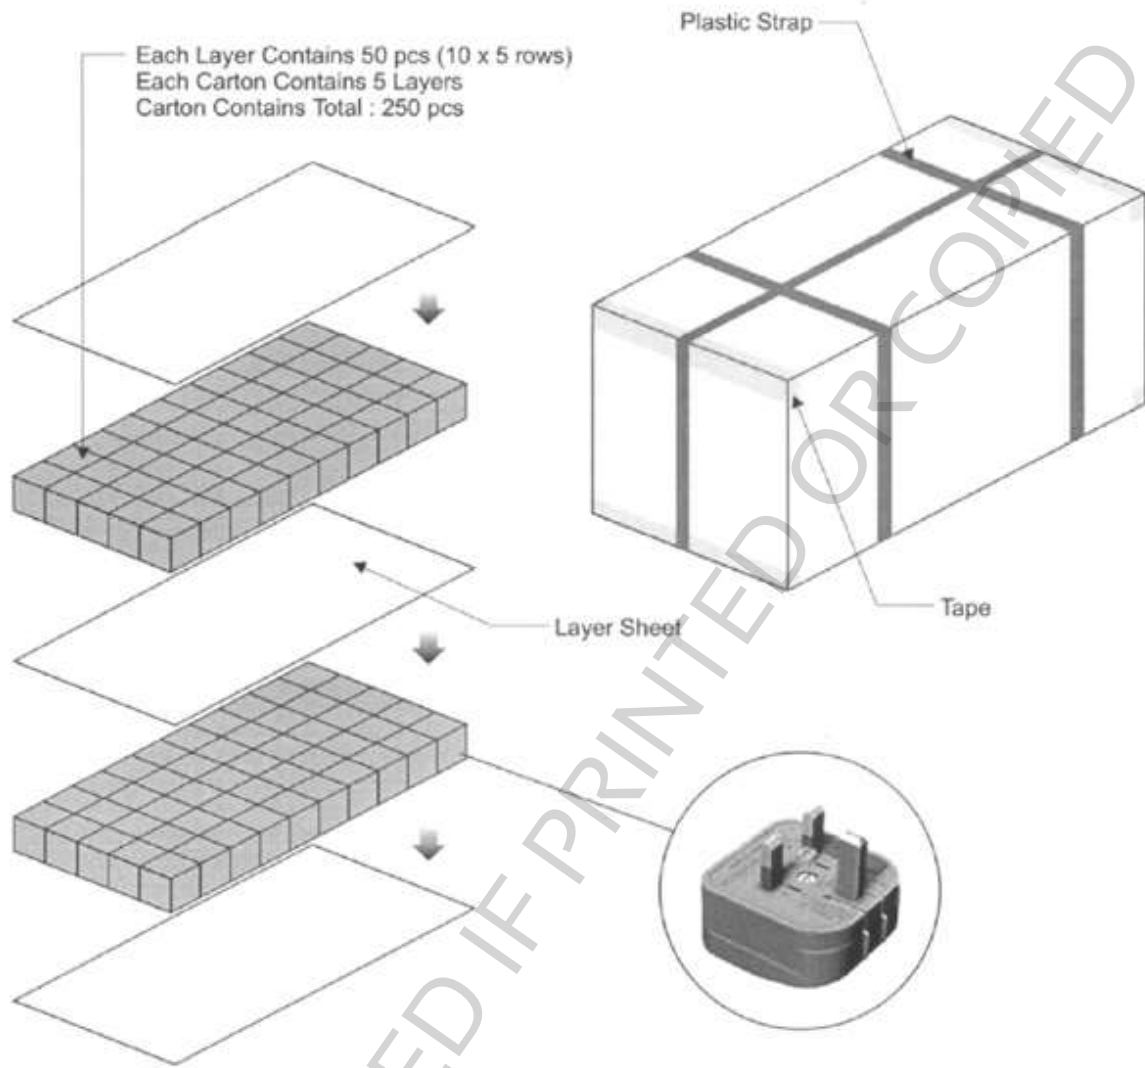


		THIS DOCUMENT CONTAINS INFORMATION WHICH IS PROPRIETRY TO POWERCONNECTIONS AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION			
		TITLE	Plugtop Converter Plug	DRAWN BY	CHECKED BY
Part No. CP1		SPECIFICATION NO. 700-0001			
		REVISION I			

15.0 Dimensional Drawing and Markings

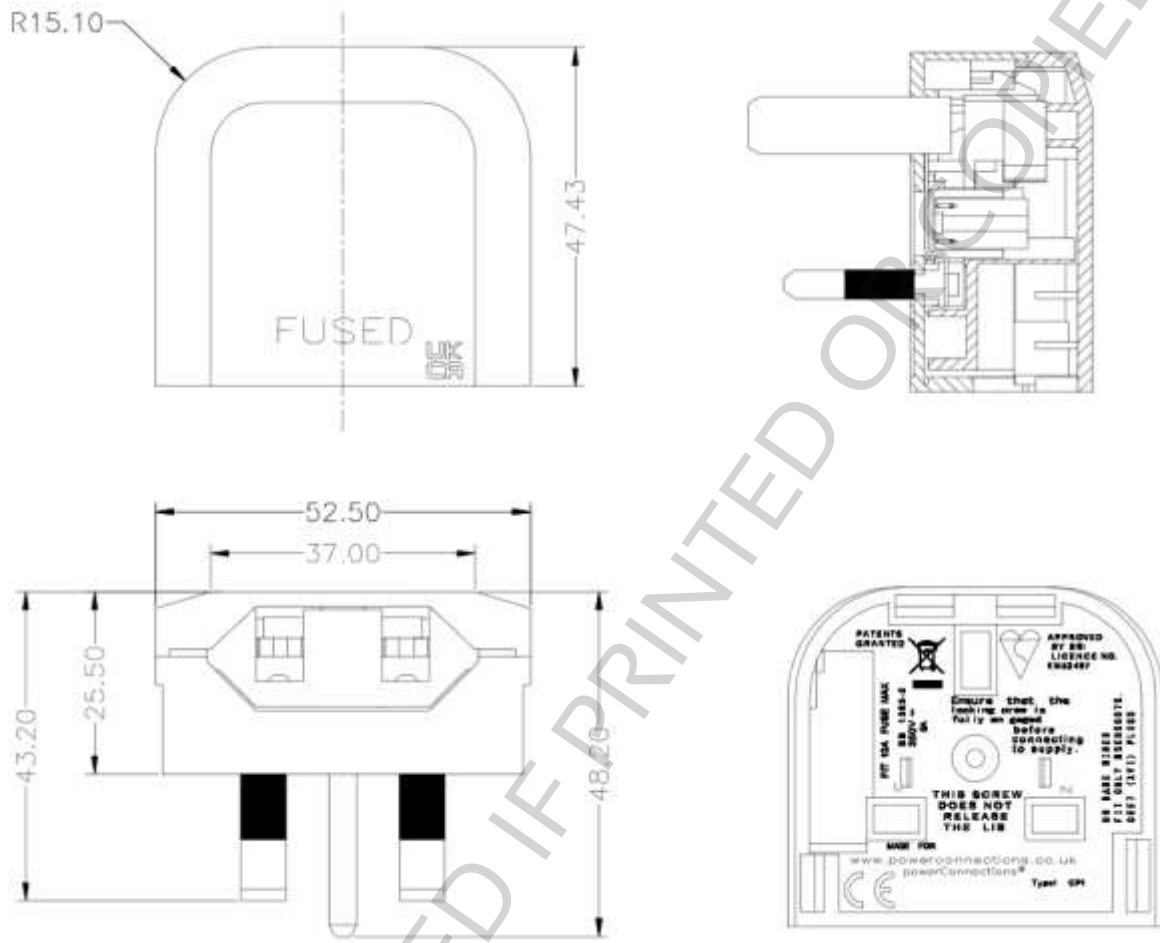

DO NOT SCALE FROM DRAWING
Unless otherwise stated, dimensions are mm

PowerConnections		THIS DOCUMENT CONTAINS INFORMATION WHICH IS PROPRIETRY TO POWERCONNECTIONS AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		
TITLE	Plugtop Converter Plug	DRAWN BY	CHECKED BY	APPROVED BY
Part No. CP1	SPECIFICATION NO. 700-0001			
REVISION I				